


PRYSMIAN  
**FP PLUS**



'ENHANCED' FIRE RESISTANT CABLE 300/500 V

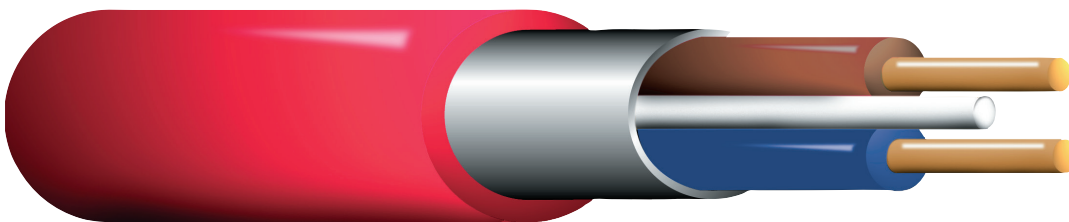

### Conductor

Plain annealed copper. Solid (1.5 & 2.5 mm<sup>2</sup>) or stranded circular conductors (4.0 mm<sup>2</sup>) to meet the requirements of BS EN 60228 class 1 or class 2.

### Insulation

High performance, damage resistant enhanced Insudite™ to meet BS EN 50363-5, Type EI5. Including mica tape for 2c4mm<sup>2</sup> and all 3 & 4 core.

### Overall metallic screen and CPC

Polyester backed laminated aluminium or copper tape bonded to outer sheath to provide overall screen. In contact with full sized, tinned annealed copper circuit protective conductor and laid-up with the cores to provide automatic screen earthing

### Sheath

Robust thermoplastic low smoke, zero halogen and reduced flame propagation outer sheath. Standard colours white and red with bespoke colours available to special order. Suitable for outdoor installation with exposure to normal daylight UV.

### Key Applications

- > Fire detection and fire alarm systems for buildings
- > Voice alarm systems and emergency voice communication
- > Emergency and escape lighting
- > Control circuits for fire safety and fire fighting systems
- > Other essential service control circuits for 'enhanced' fire resistance

### British Standards, Tests & Approvals

- > BS 7629-1 Enhanced 120\*
- > BS EN 50200 PH30, PH60, PH120\*
- > BS 8434-2 Flame, impact & water test for 'enhanced' cable\*
- > BS 5839-1, 6, 8 & 9 'enhanced' fire resisting cable\*
- > BS 5266-1 'enhanced' fire resisting cable
- > BS 8519 category 2 control cable
- > BASEC approved
- > LPCB approved\*
- > BS 6387 CWZ\*

### Core identification

Harmonised - standard

- ○ brown-blue
- ○ brown-black-grey
- ○ ○ blue-brown-black-grey

Non harmonised – to special order

- ○ red-black
- ○ red-yellow-blue
- ○ black-red-yellow-blue



Temperature Range  
-20 to +70°C



Bending Radius  
r=6D



Mechanical Impact  
Medium



Fire Performance  
BS EN 60332-1-2



Flexibility  
Rigid



Halogen Free  
BS EN 60754-1



Low Smoke Emissions  
BS EN 61034-2



Fire resistance  
BS EN 50200  
PH30, PH60, PH120  
BS 8434-2  
BS 6387 CW2

Nominal cross sectional area mm <sup>2</sup>	Conductor Construction no/mm	Approximate overall diameter mm	Approximate cable weight kg/km	Maximum conductor resistance at 20°C Ω/km	Current rating DC or single phase AC Enclosed Amps	Current rating DC or single phase AC Clipped direct Amps	Volt drop DC or single phase AC mV/A/m	Recommended accessories Colour - White or Red	
								LSOH <sup>®</sup> fixing clips	Nylon LSOH <sup>®</sup> gland

#### Two core

1.5	1/1.38	9.2	115	12.1	16.5	19.5	29	AP9	251/GL2520
2.5	1/1.78	11.5	180	7.41	23	27	18	AP11	252/GL2520
4.0*	7/0.85	12.2	235	4.6	30	36	11	AP12	252

#### Three core

1.5	1/1.38	11.7	175	12.2	16.5	19.5	29	AP11	252/GL2520
2.5	1/1.78	12.7	230	7.41	23	27	18	AP12	252
4.0*	7/0.85	13.0	290	4.6	30	36	11	AP13	252

#### Four Core

1.5	1/1.38	12.5	210	12.2	16.5	19.5	29	AP12	252
2.5	1/1.78	13.5	270	7.41	23	27	18	AP13	254
4.0*	7/0.85	14.7	355	4.6	30	36	11	AP14	254

\*Product FP PLUS FLEX

#### Notes to table

- > Recommended clip spacing 300 mm horizontal and 400mm vertical.
- > Minimum recommended installation temperature 0°C. Installation methods for current rating in accordance with BS7671/IET Wiring Regulations.
- > The tabulated ratings are based upon a 30°C ambient temperature and 70°C operating temperature. For other ambient temperatures or where cables are grouped together, appropriate de-rating factors should be applied.
- > De-rate by factor 0.8 when 4 cores are loaded

#### Correction factors for Ambient temperatures: Table 4B1

Ambient Temperature°C	25	30	35	40	45	50
Rating factor	1.03	1.00	0.94	0.87	0.79	0.71

#### Correction factors for grouping of cables: Table 4C1

Number of cables	2	3	4	5	6	7
Rating factor	0.80	0.70	0.65	0.60	0.57	0.54

Sales enquiries  
Tel: 0845 767 8345  
Fax: 023 8029 5465

Overseas sales enquiries  
Tel: +44 (0) 23 8029 5481  
Fax: +44 (0) 23 8029 5465

UK Technical helpline  
Tel: 0845 767 8345

Overseas technical  
Tel: +44 (0) 23 8029 5481

Prysmian Cables & Systems Limited  
Chickenhall Lane  
Eastleigh  
Hampshire  
SO50 6YU  
United Kingdom  
[www.whyprysmian.co.uk](http://www.whyprysmian.co.uk)

Information Hotline  
Tel: +44 (0) 23 8029 5029  
Fax: +44 (0) 23 8029 5437



For further information please  
see our dedicated FP Cables website:  
[www.fpcables.co.uk](http://www.fpcables.co.uk)



Should you have any concerns about unsafe, non-approved or counterfeit cable, please contact the ACI

Tel: 020 8946 6978  
Email: [report@aci.org.uk](mailto:report@aci.org.uk)



All sizes and values without tolerances are reference values. Specifications are for products afterwards may give different results. The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part without written consent of Prysmian Group. Prysmian Group reserves the right to amend this specification without prior notice.