




# FIRE PERFORMANCE NEWS



[www.fpcables.co.uk](http://www.fpcables.co.uk)


## FIREFIX FROM PRYSMIAN IS FAST AND EASY

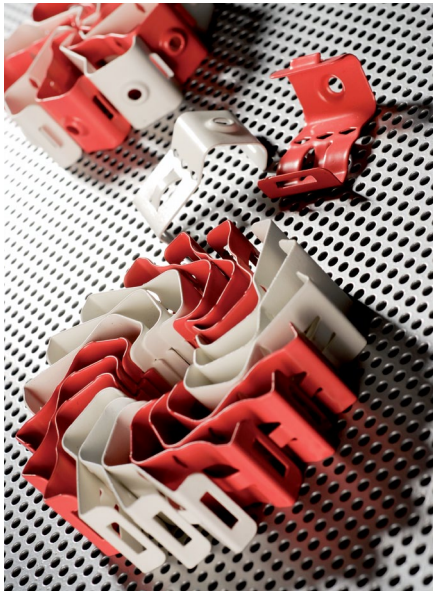

Prysmian's **FP Firefix** is the fast and easy way to install **FP200 Gold** or **FP Plus** cables and meet the standard. British Standards for the fire alarm, emergency lighting and life safety systems **all require** metallic fixing that will not compromise the fire resistance of the cables and **will ensure circuit integrity is maintained** in the event of a fire.

Prysmian developed Firefix in association in association with ITW Construction Products to fit the Palsa 800E gas nailing tool - **NO** explosive charges and suitable for a range of construction materials including composite-decking, steel and concrete.

FP Firefix is available in red or white, single or double - contact us to arrange a site trial or **demonstration**.

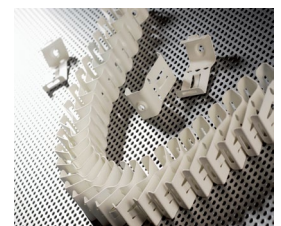

	CABLE		COLOUR		TYPE		CODE
	FP200 Gold	FP PLUS	RED	WHITE	SINGLE	DOUBLE	
2c 1.5mm <sup>2</sup>	●		●		●		UFPNF01R
2c 1.5mm <sup>2</sup>	●		●			●	UFPNF02R
2c 1.5mm <sup>2</sup>	●			●	●		UFPNF01W
2c 1.5mm <sup>2</sup>	●			●		●	UFPNF02W
2c 1.5mm <sup>2</sup>		●	●		●		UFPNF03R
2c 1.5mm <sup>2</sup>		●		●	●	●	UFPNF03W
3c 1.0mm <sup>2</sup>	●		●			●	UFPNF02R
3c 1.0mm <sup>2</sup>	●			●		●	UFPNF02W
3c 1.5mm <sup>2</sup>	●		●			●	UFPNF04R
3c 1.5mm <sup>2</sup>	●			●		●	UFPNF04W
4c 1.0mm <sup>2</sup>	●		●			●	UFPNF04R
4c 1.0mm <sup>2</sup>	●			●		●	UFPNF04W



**FOR FURTHER INFORMATION**

**Please contact marketing:**

Tel: 023 8029 5029

Email: [cables.marketing.uk@prysmian.com](mailto:cables.marketing.uk@prysmian.com)



# FIRE PERFORMANCE NEWS



[www.fpcables.co.uk](http://www.fpcables.co.uk)

## GLANDS APPROVED FOR FP 200 GOLD AND FP PLUS

### Nylon easyfit glands – FP GLAND FP2520

Introducing the speedy installation FP Gland from Prysmian fully approved for **FP200 Gold** and **FP PLUS**. This lightweight nylon gland is the single solution for the whole range of both cables, one size fits all. Suitable for 'standard' and 'enhanced' fire resistant wiring systems eg. emergency lighting, fire detection and fire alarm systems so its low fire hazard 'LSOH' construction makes it the ideal choice. The FP GLAND is IP68 rated so its the flexible solution for indoor and outdoor installations, available in red & white to match your FP.

- > Easy Fit Gland
- > One size fits all (9-32mm)
- > Available in red or white
- > IP68 Rated



### LSOH Unarmoured cable gland

This Bicon high quality brass gland kit from Prysmian is suitable for un-armoured, circular cables for both indoor and outdoor applications. Single or double kits comprise of brass gland body, brass locknut and LSOH black shrouds. Use this kit to ensure a waterproof and weatherproof unarmoured cable system.



- > EN 50262 & BS 6121-1
- > Service temperature -20°C to +90°C
- > CuZn39Pb3 brass alloy for guaranteed performance

Cable Dimensions mm		Kit Reference			Gland Dimensions mm				
Overall Diameter A		Size	Design No.	Items Per Kit	Entry Thread		Approx Length From Shoulder D mm	Hexagon Size	
Min	Max				Size B	Length C		Across Flats E	Across Corners F
3.5	8.5	20SS	423LSF71	2	M20 X 1.5	10	20	22.0	24.9
8.0	11.5	20S	423LSF72	2	M20 X 1.5	10	22	22.0	24.9
11.0	13.5	20	423LSF53	2	M20 X 1.5	10	22	24.0	26.8
13.0	19.5	25	423LSF55	2	M25 X 1.5	10	25	30.5	34.0
19.0	25.5	32	423LSF56	1	M32 X 1.5	10	25	42.4	48.0
25.0	32.0	40	423LSF57	1	M40 X 1.5	15	33	47.2	53.6
31.5	37.0	50S	423LSF58	1	M50 X 1.5	15	30	55.0	60.0
36.5	43.0	50	423LSF59	1	M50 X 1.5	15	30	56.4	61.5
42.5	50.0	63S	423LSF60	1	M63 X 1.5	15	34	70.1	77.2
49.5	55.0	63	423LSF61	1	M63 X 1.5	15	32	75.0	83.0
54.5	61.0	75S	423LSF62	1	M75 X 1.5	15	32	80.0	87.4
60.5	67.0	75	423LSF63	1	M75 X 1.5	15	40	85.0	95.0



FOR FURTHER INFORMATION

Please contact marketing:

Tel: 023 8029 5029

Email: [cables.marketing.uk@prysmian.com](mailto:cables.marketing.uk@prysmian.com)